


SUBMERSIBLE

LOW VOLTAGE

AMAZON & CONGO

- ✓ Water
 - ✓ Diesel
 - ✓ Transfer
 - ✓ Wash-down
 - ✓ Irrigation
- 13mm (1/2") – 20mm (3/4") outlet
 - manual
 - 12 volts DC
 - 24 volts DC

The **Amazon** and **Congo** pumps are low voltage, D.C., plastic submersibles for **battery operation only**. They are available in two formats: standard pump only, with a 4 metre PVC cable and crocodile clips, or as a kit which also has 4 metres of pvc/nitrile layflat hose and an adjustable on/off spray nozzle. Both are designed for transfer and drainage of fresh water, seawater and diesel fuel. Higher heads can be achieved by operating pumps in series. This is done by detaching the removable strainer and exposing the inlet which has a hose connection. The hose from another pump, of the same hose size, can be connected to this. Motors are continuously rated, but brush life is determined by usage. They must **NOT** pump, petrol, high viscosity liquids, chemicals, solvents or products with a low flash point.

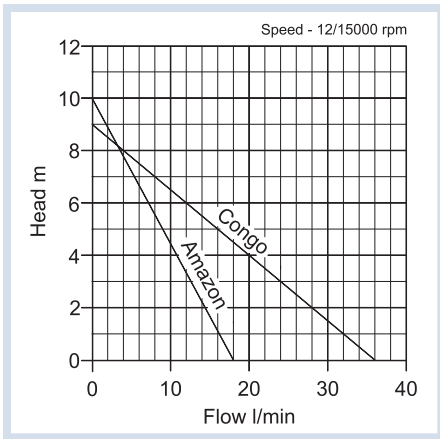

Congo



Amazon

ACCESSORIES

Hoses page 91
Hose clips page 104



Congo Kit



Amazon kit

model	outlet (mm)	volt DC	amp	free passage (mm)	flow (l/min)	head (mtrs)	dia x h (mm)	weight (kgs)
Amazon	13	12	4.50	1	18	10	Ø40x162	0.2
Amazon	13	24	2.30	1	18	10	Ø40x162	0.2
Congo	20	12	6.00	1	36	9	Ø40x162	0.3
Congo	20	24	3.00	1	36	9	Ø40x162	0.3
Amazon c/w Kit	13	12	4.50	1	18	10	Ø40x162	0.2
Amazon c/w Kit	13	24	2.30	1	18	10	Ø40x162	0.2
Congo c/w Kit	20	12	6.00	1	36	9	Ø40x162	0.3
Congo c/w Kit	20	24	3.00	1	36	9	Ø40x162	0.3