


The **KS1101/22** and **CAM88/25** automatic booster sets are single pump, self-priming units with plastic venturis and single plastic impellers. The KS features a plastic pump casing and a 22 litre pressure vessel, while the CAM features a 304 stainless steel pump casing and a 25 litre pressure vessel. Vessels incorporate a non-toxic rubber diaphragm, and have pressure gauges, adjustable pressure switches and non-return valves. They have stainless steel shafts, fitted with single mechanical seals, and have A.C., TEFV, IP44 motors. Power leads are fitted, however a switch is not supplied. They are designed for pumping clean water only at a maximum temperature of 35°C, and should not be allowed to run dry. Maximum recommended suction lift, when primed, is 7 metres. For best results, we recommend that a foot-valve and strainer should be fitted to the end of the suction hose. This is included with our 4 metre and 7 metre suction kits. These are available as an optional extra and include a pump coupling which is factory fitted to the hose for a vital, airtight connection. Used for boosting poor water pressure, and for providing water at pressure for mobile toilet block or shower systems, irrigation or wash-down.


# KS1101 CAM88

- ✓ Boosting
- ✓ Irrigation
- ✓ Wash down
- ✓ Potable Water
- 1" (25mm) inlet
- clean water
- self priming
- pressure switch
- 110 volts
- 230 volts

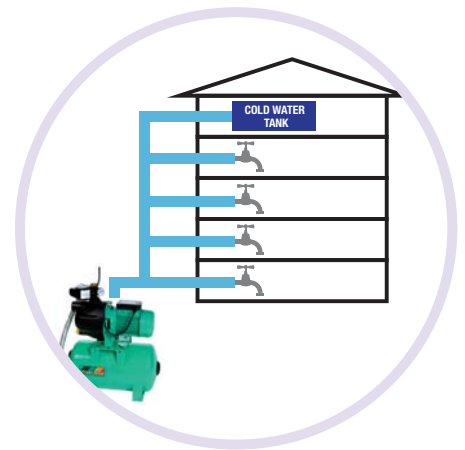

### ACCESSORIES

- Pressure hoses      page 92
- Inline strainers    page 103
- Elbows                page 100

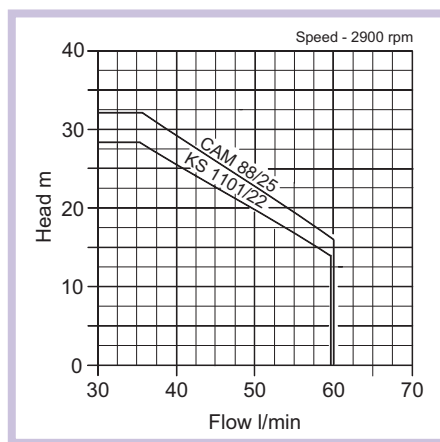

model	inlet (BSPF)	outlet (BSPF)	kW	volt	flow (l/min)	head (mtrs)	switch pre-set (bar)	vessel size	w x l x h (mm)	weight (kgs)
KS1101/22	1"	1"	1.10	230	60	28	1.4(on)-2.8(off)	22	270x480x500	15.0
CAM88/25	1"	1"	1.10	110	60	32	1.6(on)-3.2(off)	25	270x530x540	16.7

Optional extra: 4 metre suction kit c/w foot valve and strainer

Optional extra: 7 metre suction kit c/w foot valve and strainer