

# SUBMERSIBLE

SALT WATER


## ECOSUB

- 32mm (1¼") outlet
- 5mm passage
- free-standing
- automatic
- 230 volts
- ✓ Bilges
- ✓ Sumps
- ✓ Transfer
- ✓ 230v

The **Ecosub** is constructed of composite industrial plastics with 316 stainless steel fixings and motor frame. It is specifically designed for salt water use where low cost is important. It is not recommended for pond applications. The 316 stainless steel shaft is fitted with a composite impeller and a lip-type seal with a V-ring. Supplied with 10 metres of H05RN-F rubber power cable.



**Ecosub**

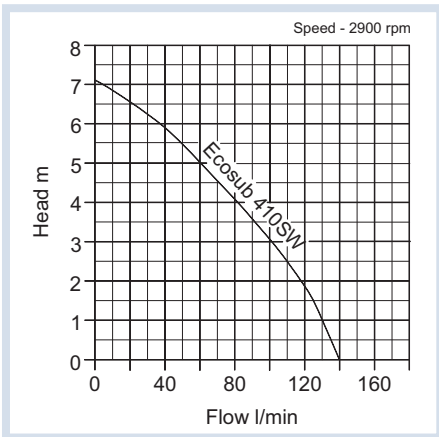

### ACCESSORIES

- Hoses page 91
- Bulkhead fittings page 98
- Hose clips page 104

model	Manual Auto	outlet (mm)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	w x l x h (mm)	weight (kgs)
Ecosub 410SW	A	32	0.28	230	140	7	5	140x140x267	3.9