


**Model JS** series for various applications, for drainage slightly waste water for portable use or permanent installation equipped with level controller for automatic operation. (For instance JS-400A)

Suitable for the dewatering of cellars, garages, basins pools, ditches, pits, for water transfer, gardening, horticulture, civil engineering, agriculture purposes.


- Motor with built in overload protector.
- Shaft with heat treatment for long lasting continuous operation.
- Mechanical seals in oil chamber with extra external lip seal.
- Rugged & Durable construction Stainless Steel & Cast Iron.
- Potted Leads: Sealed with epoxy resin.
- Extra Service:  
3 Function Selector Switch-for control of "MANUAL-OFF-AUTO" (For Instance JS-400MA)

JS100, 150, 250, 400

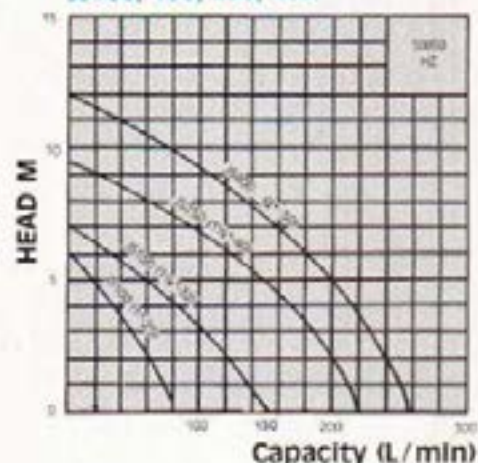


## ALL KINDS OF PUMP AVAILABLE WITH FLOAT SWITCH


JST55, T55H-50HZ  
JST75, T75H-50HZ

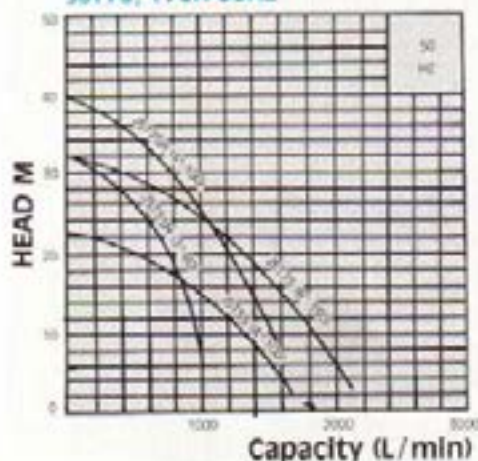


JST55, T55H-60HZ  
JST75, T75H-60HZ

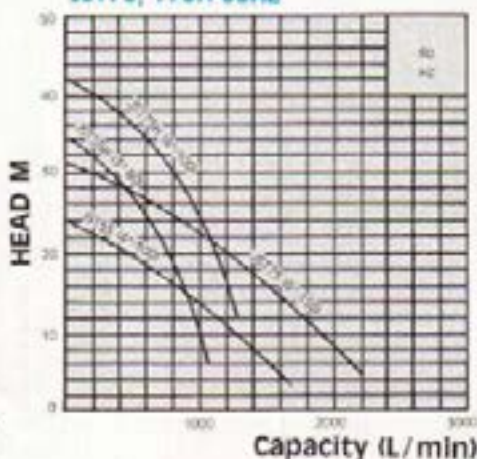

JS750, 1500(H)

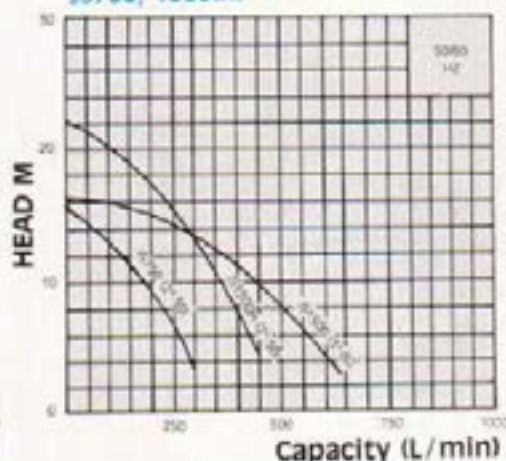

JST8, T15, T15H  
JST22, T22H, T37, T37H

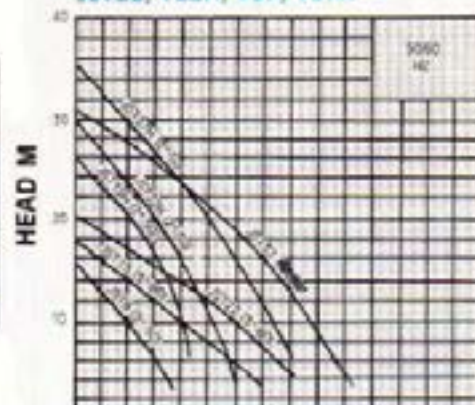

Pump Type	Outlet Diameter inch (mm)	Output Watts	Voltage 1 Phase 50 or 60Hz	Continuous		Maximum		Cable Ø x mm1 x m	Auto	Weight KG
				Head m.	Capacity L/min	Total Head m.	Max Capacity L/min			
JS-100	1"(25)	100	100V	3	60	6	85	3 x 0.75 x 3.5	JS-100A	5
JS-150	1 1/4"(32)	150		4	80	7	100	3 x 0.75 x 3.5	JS-150A	5.5
JS-250	1 1/2"(40)	250	240V	6	120	10	200	3 x 1 x 6	JS-250A	9
JS-400	2"(50)	400		8	130	12	240	3 x 1 x 6	JS-400A	10
JS-750	2"(50)	750	200V	10	200	15.5	280	3 x 1.5 x 10	JS-750A	24
JS-1500H	2"(50)	1500		15	250	22	450	3 x 2.0 x 10	JS-1500HA	40
JS-1500	3"(80)	1500	240V	6	500	17	700	3 x 2.0 x 10	JS-1500A	48