

TOP MULTI

Submersible multi-impeller pumps



PERFORMANCE RANGE

- Flow rate up to **120 l/min** (7.2 m³/h)
- Head up to **42 m**

APPLICATION LIMITS

- **10 m** maximum immersion depth
- Maximum liquid temperature **+40 °C**
- Passage of suspended solids up to **Ø 1.3 mm**
- Suction down to **22 mm** above ground level
- Continuous service **S1**

CONSTRUCTION AND SAFETY STANDARDS

Complete with :

- **10 m** long power cable
- float switch

EN 60335-1
IEC 60335-1
CEI 61-150

EN 60034-1
IEC 60034-1
CEI 2-3



CERTIFICATIONS



INSTALLATION AND USE

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. As a result of their high efficiency and reliability they are suitable for use in applications such as domestic water supply from reservoirs, tanks or relatively deep wells, for drawing rain water from cisterns to water gardens or for use in irrigation systems, etc.

PATENTS - TRADE MARKS - MODELS

- TOP MULTI® is a registered trade mark
- Registered Community Design n° e-00050929-F

OPTIONALS AVAILABLE ON REQUEST


- Pumps without float switch
- Other voltages or 60 Hz frequency

GUARANTEE

1 year subject to terms and conditions

CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 1/min

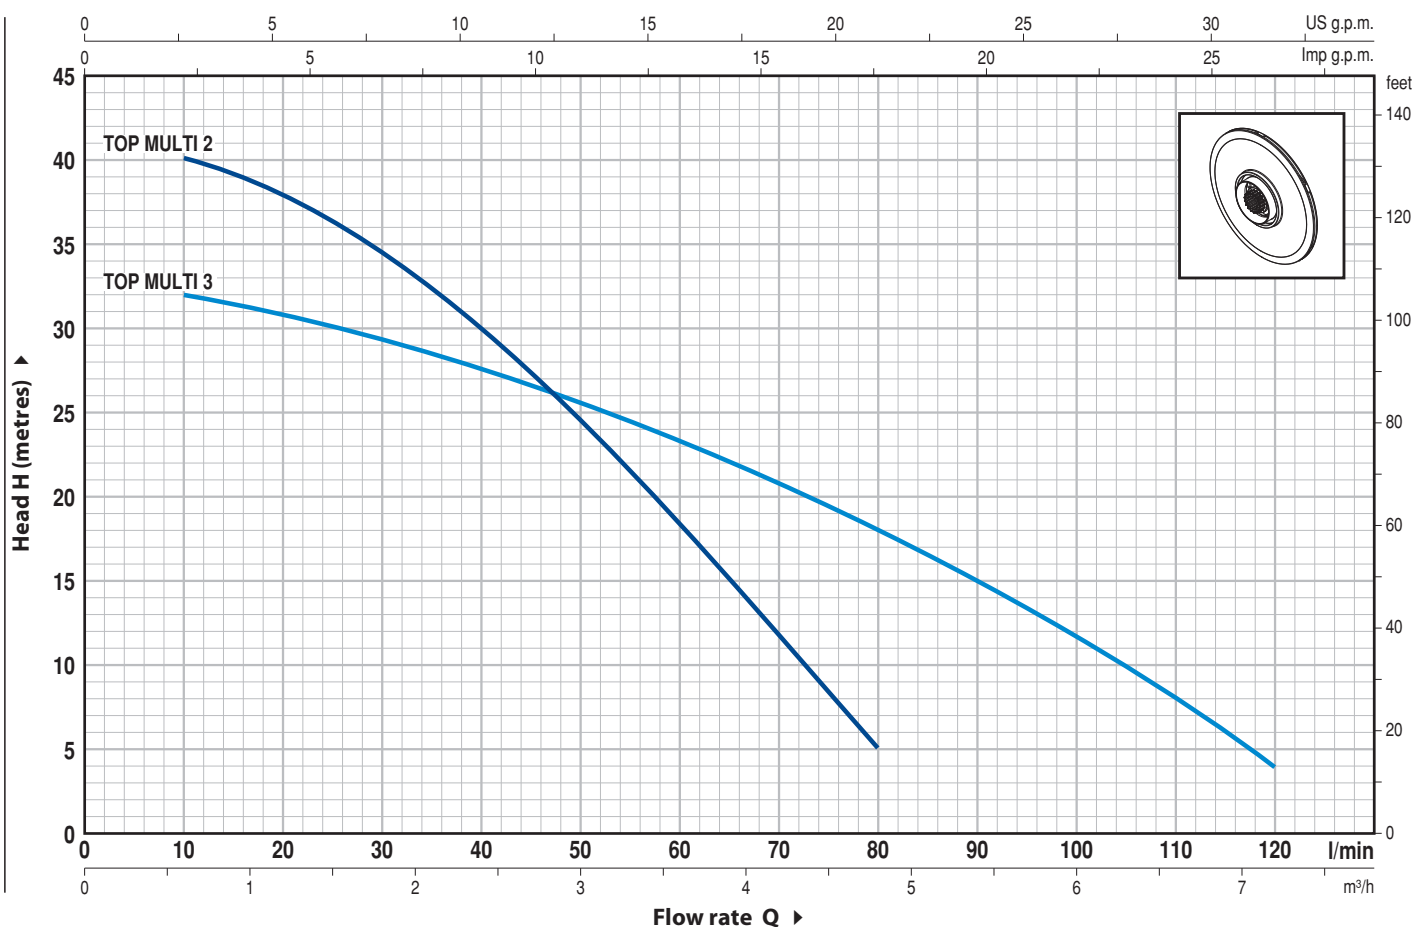


MODEL Single-phase	POWER		Q														
	kW	HP		m³/h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0	6.6	7.2
TOP MULTI 2	0.55	0.75	H metres	l/min	0	10	20	30	40	50	60	70	80	90	100	110	120
TOP MULTI 3	0.55	0.75															



Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 App. A.

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
1	DELIVERY BODY	Glass fibre reinforced technopolymer, complete with threaded delivery port in compliance with ISO 228/1
2	PUMP BODY AND SUCTION FILTER	Glass fibre reinforced technopolymer
3	MOTOR SLEEVE	Stainless steel AISI 304
4	IMPELLERS	Noryl GFN2V
5	DIFFUSERS	Noryl GFN2V complete with anti-wear rings
6	MOTOR SHAFT	Stainless steel EN 10088-3 - 1.4104
7	TWO MECHANICAL SEALS SEPARATED BY AN OIL CHAMBER	
	<i>Seal</i>	<i>Shaft</i> <i>Position</i> <i>Materials</i>
	<i>Model</i> <i>Diameter</i>	<i>Stationary ring</i> <i>Rotational ring</i> <i>Elastomer</i>
	AR-13R Ø 13 mm	Motor side Ceramic Graphite NBR
	AR-12R SIC Ø 12 mm	Pump side Ceramic Silicon carbide NBR
8	BEARINGS	6202 ZZ - C3 / 6201 ZZ
9	CAPACITOR	
	<i>Capacitance</i>	
	(230 V or 240 V) (110 V)	
	12.5 µF 450 VL 30 µF 250 VL	
10	ELECTRIC MOTOR	
	TOP MULTI: single-phase 230 V - 50 Hz with built-in overload protector.	
	– Insulation: F class.	
	– Protection: IP 68.	
11	POWER CABLE	
	⇒ 10 metre long “H07 RN-F” cable with Schuko plug	
12	FLOAT SWITCH	
13	HOSE CONNECTOR WITH UNION	
	Ø 35 mm hose connection	
14	PIPE COUPLING	
	Threaded 1¼" in compliance with ISO 228/1, complete with clapet valve	

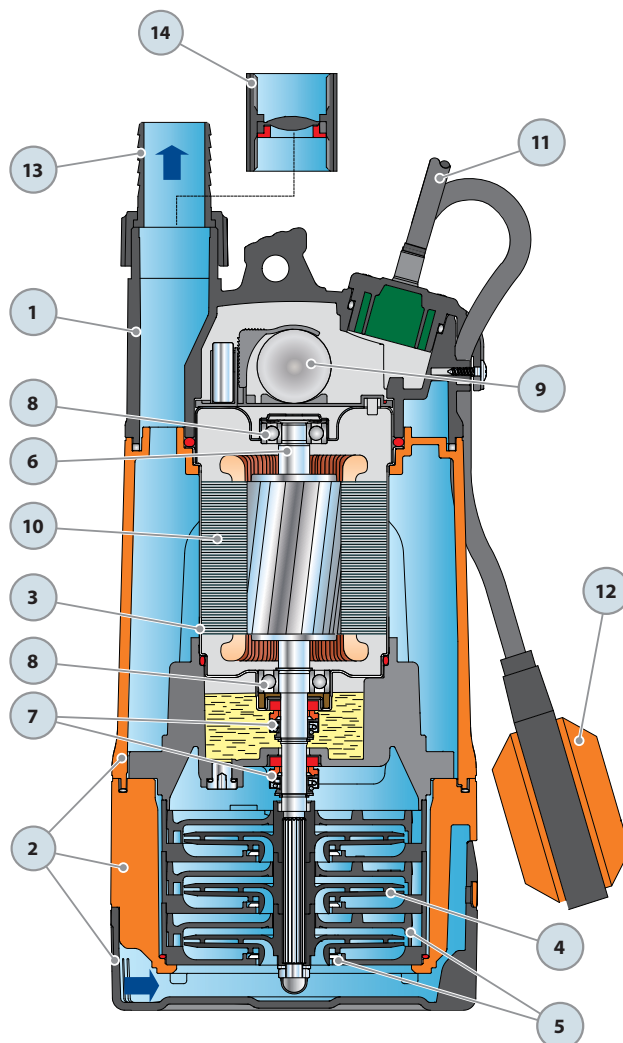

DIMENSIONS AND WEIGHT

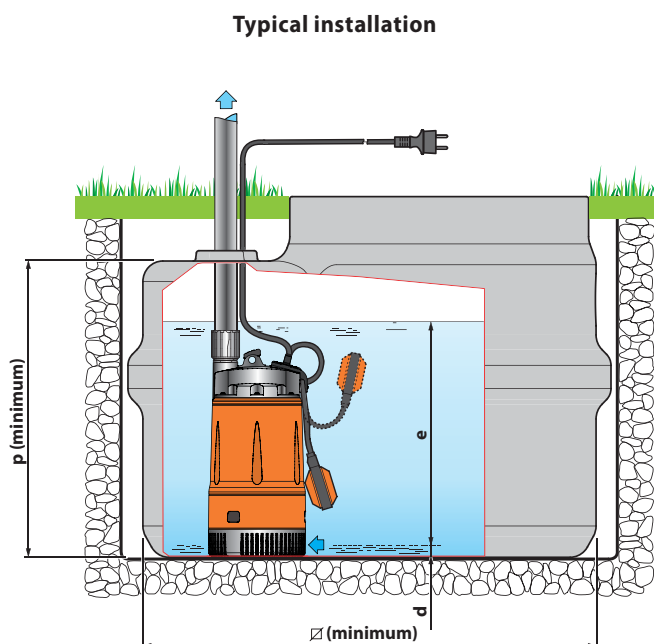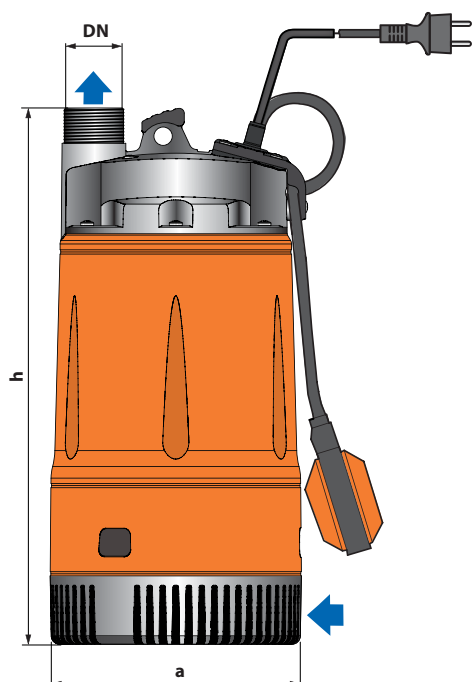

MODEL	PORT DN	N° STAGES	DIMENSIONS mm						Kg
Single-phase			a	h	d	e	p	Ø	
TOP MULTI 2	1 1/4"	3	178	380	22	variable	500	500	9.4
TOP MULTI 3									

ABSORPTION

MODEL	VOLTAGE (single-phase)		
Single-phase	230 V	240 V	110 V
TOP MULTI 2	3.4 A	3.3 A	6.8 A
TOP MULTI 3	3.6 A	3.5 A	7.2 A

PALLETIZATION

MODEL	GROUPAGE			CONTAINER		
	n° pumps	H (mm)	kg	n° pumps	H (mm)	kg
Single-phase						
TOP MULTI 2	60	1370	582	80	1780	770
TOP MULTI 3	60	1370	582	80	1780	770

