

SUBMERSIBLE

KTV(E)


HEAVY DUTY SITE DRAINAGE

- 2" (50mm) – 3" (80mm) outlet
- 0.75kW – 5.5kW
- automatic
- 400 volts 3 phase
- ✓ Hire fleets
- ✓ Quarries
- ✓ Construction
- ✓ Processing

The **KTV(E)** pumps offer an automatic option to the KTV series, without the need for external control panels and cumbersome float switches. The sensor probe is mounted in a durable, moulded rubber bracket and, for added protection, it is positioned within the footprint of the pump base. Once the water level reaches the probe, the pump will start and continue to operate for one minute after the water falls below it. However, if the water touches the probe within this time, the "stop" signal is cancelled and the pump continues to run until the water is cleared. All models are supplied with 20 metres of heavy duty, H07RN-F rubber power cable, except the KTVE2.75 which is supplied with 10 metres. IDS (individually screened cable) is available, at an extra cost, on 3.7kW and 5.5kW models, for quarry and mining applications.



KTVE22.2

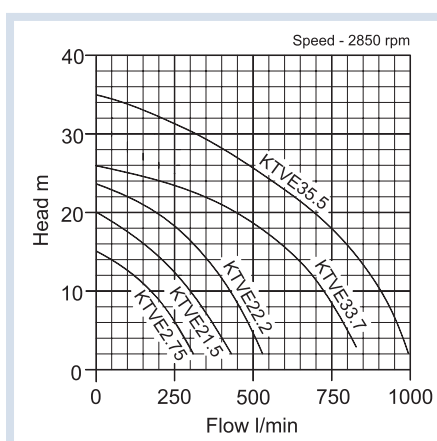

ACCESSORIES

- Hoses page 91
- Non return valves page 102
- Female hose tails page 93

model	Manual or Auto	outlet (BSPM)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	dia x h (mm)	on level (mm)	off level (mm)	weight (kgs)
KTVE2.75	A	2"	0.75	400	320	15	6	Ø200x417	204	65.00	12.0
KTVE21.5	A	2"	1.5	400	425	20	8.5	Ø240x486	235	80.00	20.0
KTVE22.2	A	2"	2.2	400	525	24	8.5	Ø240x486	235	80.00	23.5
KTVE33.7	A	3"	3.7	400	830	26	8.5	Ø285x585	297	90.00	35.5
KTVE35.5	A	3"	5.5	400	980	35	8.5	Ø300x620	327	90.00	47.0